



Repairing Palm Treo 650 Speaker



Step 1 - Battery

- Place your Palm Treo 650 on a table in front of you as shown.



Step 2

- Flip the phone over as shown.
- Remove the stylus found on the back of your phone.



Step 3

- Remove battery cover.
- Hold down the button on the back near the middle of the phone.
- Slide the cover down.



Step 4

- Lift the edge of the battery as pictured and pull out.





Step 5 - installation Case

- Remove the small round rubber cover on the back of the phone.
- This will uncover a screw that will be removed in an upcoming step.



Step 6



- Unscrew six 6.9 mm black screws with a T5 Star screwdriver.
- Unscrew one 9.75 mm antenna screw with a T5 Star screwdriver.
- Pull out antenna.





Step 7

- Pry the back cover off using an iPod opening tool or a similar tool.
- The back cover is attached by several small clips on the inside.

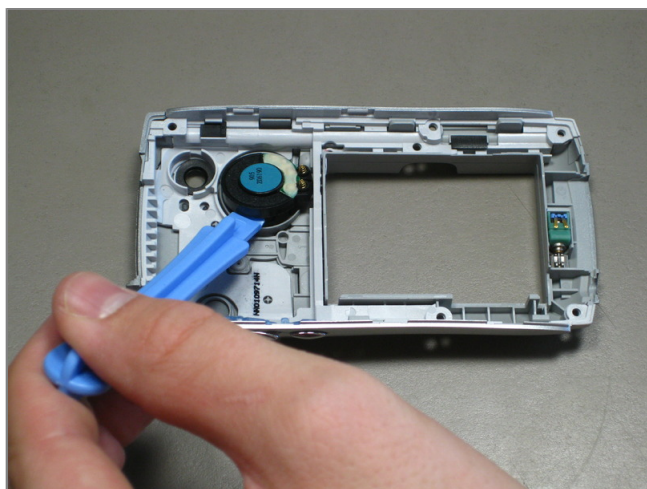

Step 8 - Speaker

- Using an ipod case opener or similar tool, simply pry off the speaker.
- This may be glued in, so remove carefully.

